


TECHNICAL DATA SHEET

PRODUCT:

PACOTHANE HT1500 is a two-sided Release Film engineered for Printed Circuit Board Lamination. When used in applications it will consistently contain any resin squeeze-out while acting as a buffer to protect copper from damaged plates or other induced surface related imperfections. Its low X-Y axis shrinkage stabilizes the stress effects from Aluminum tooling plates. HT1500 can help reduce the frequency of plate cleaning and prevents press pads from sticking to press platens, tooling plates and bonding to tooling pins.

RECOMMENDED LAMINATION LAY-UP:

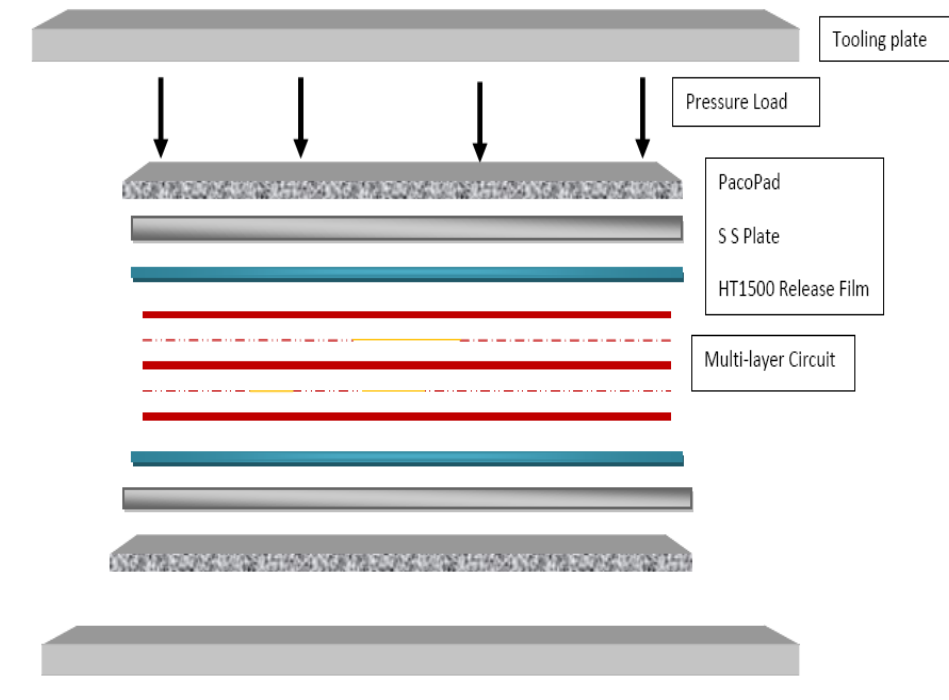

Physical Property		Test Method	Reported Units	Typical Values	
Max. Application Temp.		Q 1025	°F (°C)	400(204)	
Thickness		Q 3019	mil (µm)	1.50 (38.1)	
Density		ASTM	g/cm ³	0.94	
Heat Shrinkage		MD	%	<5%	
		TD	%	<5%	
Melting Temp.		ASTM E794	°F (°C)	495°F (257°C)	
Appearance		White, Semi-translucent			
Tensile Strength (At yield point)	MD	YP	ASTM D882	Kg/cm ²	230
		Elong	ASTM D882	%	410
	TD	YP	ASTM D882	Kg/cm ²	190
		Elong	ASTM D882	%	520

SHELF LIFE & STORAGE:

- Material should be kept in dry and clean room, below 113°F (45 °C)
- Material should be kept out of heat and sunlight
- Shelf life: 12 months upon receipt of material

Note: Pacothane generates this data sheet and specifications that are just for reference. We cannot control the performance impact from different process, storage and manufacturing variables.