


TECHNICAL DATA SHEET

PRODUCT:

PACOTHERM is a PACOTHANE-clad releasable press pad with the exact same attributes of Pacopads that provides a single component resolution in your lamination lay-up area. They offer cleaner handling, single stage lay-up for the operator and better productivity. PACOTHERM's primary function is to economically deliver consistent repeatable heat rise while insuring maximum "Z" axis pressure distribution. They can be matched to previous lamination profiles as they are available in thickness of .035" and .055".

RECOMMENDED LAMINATION LAY-UP:

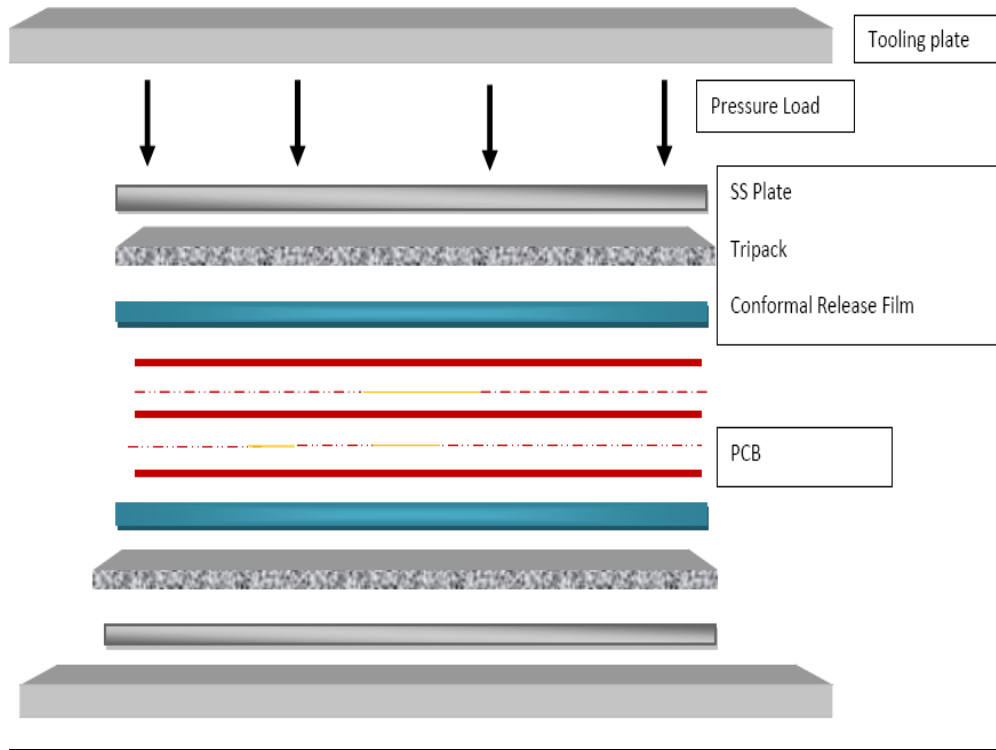

TECHNICAL DATA:

Physical Property	Test Method	Reported Units	Typical Values
Max. Application Temp.	Q 1025	°F (°C)	475°F(246°C)
Gauge	T-411	in	0.0550 ± 10 %
Density	T-410 and T411	Lb/in	4.5
Tensile (MD)	T-494	Lb/in	≤ 10
Brightness	T-452	%	85.0
Compression	ASTM F806-88	%	40.0

SELF LIFE AND STORAGE: Material should be kept dry and in a clean room below 113°F (45°C)